

90 DAYS LIMITED WARRANTY

For a period of ninety (90) days from date of purchase, **Shinn Fu Co. of America, Inc.** will repair or replace, at its option, without charge, any of its products which fails due to a defect in material or workmanship, or which fails to conform to any implied warranty not excluded hereby.

Except where such limitations and exclusions are specifically prohibited by applicable law, (1) the CONSUMER'S SOLE AND EXCLUSIVE REMEDY SHALL BE THE REPAIR OR REPLACEMENT OF DEFECTIVE PRODUCTS AS DESCRIBED ABOVE, and (2) **Shinn Fu Co. of America, Inc.** SHALL NOT BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGE OR LOSS WHATSOEVER, and (3) THE DURATION OF ANY AND ALL EXPRESSED AND IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, IS LIMITED TO A PERIOD OF NINETY (90) DAYS FROM DATE OF PURCHASE.


Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Model
I-4039



**12 Volt
D.C.**

Car Fan

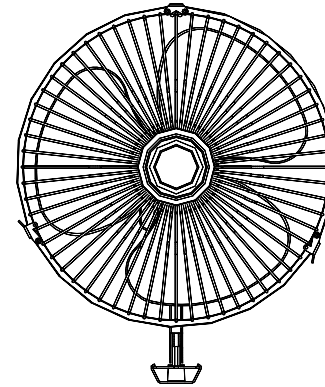

Shinn Fu Company of America, Inc. ©
2003
10939 N. Pomona Ave.
Kansas City, MO 64153
Phone: (816)891-6390
Fax: (816)891-6599


Printed in China
I-4039-M0_042014

⚠ WARNING

Study, understand, and follow all instructions provided with and on this device before use. Only plug into a 12V cigarette lighter receptacle. Switch box gets very hot when in use. Do not attach to flammable material. Do not block air vents. Only use fuse recommended by the vehicle owner's manual. Do not position the power cord where it may become damaged. Keep out of the reach of children. Failure to heed these markings may result in personal injury and / or property damage.

⚠ ADVERTENCIA

- Leer, comprender, y seguir las instrucciones antes de utilizar el aparato.
- El manual de instrucciones y la información de seguridad deben estar comunicado en lengua del operador antes del uso.
- No seguir estas indicaciones puede causar daños personales o materiales.

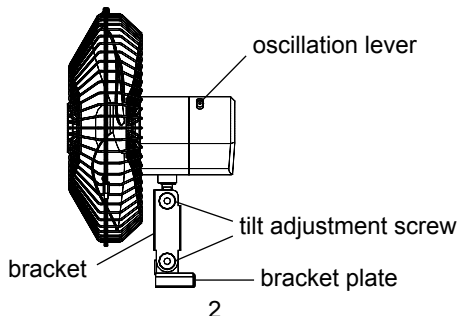

! SAFETY MESSAGE !

No alteration shall be made to this device. Only attachments and / or adapters supplied by the manufacturer shall be used.

INSTALLATION

1. Locate a suitable place to install the fan, for example, on the dashboard or doorpost. Be sure the fan can oscillate freely.
2. Using the fan's bracket plate as a template, drill two 1/8" holes in the mounting location and install the bracket plate with two provided self tapping screws.
3. Secure the bracket to the bracket plate with screw attached.
4. Attach the switch box to a metal (non-flammable) surface.

OPERATION

1. Oscillation Lever: The fan oscillates if this lever is pulled down. To stop oscillation, push the lever back up.
2. Variable Shift Head Oscillation Mechanism: To reset the angle of the fan, turn the head to desired position. Oscillation will then continue at the new angle.
3. Tilt Adjustment Screws: To change the degree of upward or downward tilt of the fan, loosen the screws and set the head to the desired angle, then re-tighten the screws.
4. Power Switch: To turn the power on, push the switch on the switch box to FAST for high speed, SLOW for low speed.

MAINTENANCE

Periodically inspect the Car Fan for cracked or worn wiring. Ensure that all parts move freely. Clean the fan with a wet rag. Do not use gasoline, benzine, thinners or other volatile solvents. Lubrication is not necessary, as a special oil-less metal is used.